UWELL

NUNCHAKU MINI

Bedienungsanleitung
User Manual

©2026 By SHENZHEN UWELL TECHNOLOGY CO., LTD. All Rights Reserved.

GERMAN

Produktübersicht



1. Pod
2. Einfüllstopfen
3. Gerät
4. Digitalanzeige
5. USB-C-Anschluss
6. Bodenabdeckung
7. Schraube

Technische Daten


Materialien: PCTG, PC, Aluminiumlegierung
Abmessungen: 111 mm × 28 mm × 28 mm
Nettogewicht: 63 g
Maximale Ausgangsleistung: 16 W
Pod-Spezifikation: FeCrAl-Waben-Mesh, 0,8 Ω
Akkukapazität: 1000 mAh

Kurzanleitung

1. Entfernen Sie die Schutzfolie von der Unterseite des Geräts. Nehmen Sie den Pod heraus und ziehen Sie die Isolierfolie von der Unterseite des Pods ab.
2. Öffnen Sie den Einfüllstopfen und befüllen Sie den Pod mit E-Liquid. Setzen Sie den Pod nach dem Befüllen in das Gerät ein und lassen Sie ihn 10 Minuten ruhen.

Ausführliche Anleitung

a. Entfernen Sie vor dem ersten Gebrauch die Schutzfolie von der Unterseite des Geräts.
b. Nehmen Sie den Pod heraus. Ziehen Sie vor dem ersten Gebrauch die Isolierfolie von der Unterseite des Pods ab.
c. Öffnen Sie den Einfüllstopfen und befüllen Sie den Pod mit E-Liquid.
d. Schließen Sie den Einfüllstopfen.
e. Setzen Sie den Pod in das Gerät ein.
f. Zum Auswechseln des Pods nehmen Sie den alten Pod aus dem Gerät und setzen Sie einen neuen ein.



Vorsichtsmaßnahmen:

a. Führen Sie die Spitze der E-Liquid-Flasche vor dem Befüllen vollständig in die Einfüllöffnung ein.
b. Lassen Sie die Einfüllöffnung nicht längere Zeit offen. Schließen Sie den Einfüllstopfen bzw. das Mundstück unmittelbar nach dem Befüllen und stellen Sie sicher, dass der Verschluss fest sitzt, um ein Auslaufen zu verhindern.
c. Lassen Sie einen neu befüllten Pod vor dem ersten Gebrauch 10 Minuten ruhen, um Trockenfeuern und Schäden an der Coil zu vermeiden.
d. Füllen Sie den Pod nach, sobald der verbleibende E-Liquid-Füllstand unter die Oberkante des Geräts fällt.

2. Dampfen

Während des Dampfens leuchtet das Display auf und zeigt den aktuellen Akkustand an. 3 Sekunden nach Ende des Zuges schaltet sich das Display aus.

3. Akkustandsanzeige

Beim Laden und Entladen zeigt das Display den Akkustand in Schritten von 5 % an.

4. Laden


a. Schließen Sie ein USB-C-Ladegerät an. Das Display zeigt den aktuellen Akkustand an, und während des Ladevorgangs blinkt das Blitzsymbol.
b. Wenn der Akku vollständig geladen ist, schaltet sich das Display nach 3 Sekunden aus.
c. Nach dem Trennen des Ladegeräts vom Gerät schaltet sich das Display nach 3 Sekunden aus.

5. Schutzfunktionen und Warnanzeigen

Kurzschlussschutz: Bei einem Kurzschluss blinkt das Display fünfmal und das Gerät unterbricht die Leistungsabgabe.
Unterspannungsschutz: Bei niedrigem Akkustand blinkt das Display fünfmal und das Gerät unterbricht die Leistungsabgabe.
Zeitüberschreitungsschutz: Dauert ein Zug länger als 6 Sekunden, blinkt das Display fünfmal und das Gerät stoppt die Leistungsabgabe.

6. Ausbau des Akkus

a. Lösen Sie die drei Schrauben an der Unterseite mit einem T4-Torx-Schraubendreher.
b. Entfernen Sie die Bodenabdeckung.
c. Ziehen Sie den Steckverbinder heraus.
d. Ziehen Sie den Akku mithilfe der Akku-Zuglasche heraus.
e. Drücken Sie die Verriegelungslaschen auf beiden Seiten des Steckverbinders zusammen und trennen Sie anschließend die Steckverbindung.

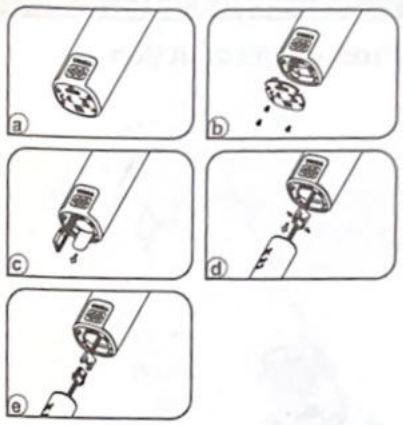

Wichtige Hinweise

1. Verwenden Sie zum Laden ausschließlich ein hochwertiges, sicherheitszertifiziertes Netzteil (5 V/2 A) und ein kompatibles USB-Kabel.
2. Entfernen Sie bei Flugreisen den Pod vom Gerät und verpacken Sie ihn separat. Druckschwankungen in der Flugzeugkabine können zum Auslaufen von E-Liquid führen.
3. Halten Sie das Gerät von hohen Temperaturen, entzündbaren oder explosiven Stoffen, Wasser, Feuchtigkeit und extremer Kälte fern. Transportieren Sie das Gerät nicht zusammen mit harten oder scharfkantigen Gegenständen, da es dadurch beschädigt werden kann. Laden Sie das Gerät mindestens einmal im Monat auf, um seine Lebensdauer zu verlängern.
4. Verwenden Sie das Gerät nicht in Umgebungen mit hoher elektrostatischer Aufladung.

ENGLISH

Product Introduction



1. Cartridge
2. Fill Plug
3. Device
4. Digital Display
5. USB Type-C Port
6. Bottom Cover
7. Screw

Product Specifications

Materials: PCTG, PC, aluminum alloy
Dimensions: 111 mm × 28 mm × 28 mm
Net Weight: 63 g
Maximum Output Power: 16 W
Pod Specification: FeCrAl honeycomb mesh 0.8 Ω
Battery Capacity: 1000 mAh


Quick Start Guide

1. Remove the protective film from the bottom of the device. Remove the pod and peel off the insulating film from the bottom of the pod.
2. Open the fill plug and fill with e-liquid. After filling, insert the pod into the device and let it sit for 10 minutes.

Detailed Instructions

1. Filling the Cartridge

a. Before first use, remove the protective film from the bottom of the device.
b. Remove the pod. Before first use, peel off the insulating film from the bottom of the pod.
c. Open the fill plug and fill with e-liquid.
d. Close the fill plug.
e. Insert the pod into the device.
f. To replace the pod, remove the old pod from the device and install a new one.



Precautions:

a. Insert the e-liquid bottle nozzle fully into the fill port before filling
b. Do not leave the fill port open for an extended period. Close the fill plug or mouthpiece immediately after filling, and make sure it is securely in place to prevent leakage.
c. After filling a new pod for the first time, let it sit for 10 minutes before use to prevent dry firing and damage to the coil.
d. Refill the pod when the remaining e-liquid level falls below the top surface of the device.

2. Vaping

During vaping, the screen lights up and displays the current battery level. The screen turns off 3 seconds after vaping stops.

3. Battery Level Indicator

The display shows the battery level in 5% increments during charging and discharging.

4. Charging


a. Connect a USB Type-C charger. The digital display shows the current battery level, and the lightning icon flashes while charging.
b. When fully charged, the screen turns off after 3 seconds.
c. When the charger is disconnected, the screen turns off after 3 seconds.

5. Protection and Alerts

Short-Circuit Protection: When a short circuit occurs, the screen flashes five times and the device stops firing.
Low-Voltage Protection: When the battery level is low, the screen flashes five times and the device stops firing.
Timeout Protection: When a puff exceeds 6 seconds, the screen flashes five times and the device stops firing.

6. Battery Removal

a. Use a T4 Torx screwdriver to loosen the three screws on the bottom.
b. Remove the bottom cover.
c. Pull out the connector.
d. Pull out the battery using the battery pull tab.
e. Press the clips on both sides of the connector, then disconnect it.

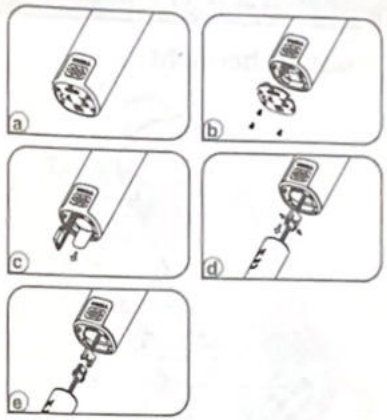

Important Information

1. Use only a high-quality, safety-certified power adapter (5 V/2 A) and a compatible USB cable for charging.
2. When traveling by air, remove the cartridge from the device and pack it separately. Changes in cabin pressure may cause e-liquid leakage.
3. Keep the device away from high temperatures, flammable or explosive materials, water, humidity, and extreme cold. Do not carry the device with hard or sharp objects, as this may cause damage. To help extend the service life of the device, charge it at least once a month.
4. Do not use the device in environments with strong static electricity.

WARNING

1. This product is only for people who have reached the legal smoking age. It is strictly forbidden to be used by young children, pregnant women, and women during breastfeeding or patients with heart disease, hypertension, diabetes, depression, and asthma. Keep the product out of the reach of children, non-smokers, and animals.
2. This product is suitable for various concentrations of e-liquid. If you directly contact e-liquid when using this product, please clean your hands and forearms thoroughly. If your eyes directly contact the e-liquid, please rinse your eyes with clean water and seek medical attention immediately. If you swallow the e-liquid, rinse your mouth and seek medical attention immediately. Please take the liquid container or label with you when you seek medical attention.
3. The product may contain nicotine, which is known to be a highly addictive substance.
4. Please keep away from flammables and explosives when using or charging to avoid hazards.
5. Do not disassemble the product. The company won't be responsible for any product damage or personal injury caused by the improper operation.

This product is in compliance with the following:
- Electromagnetic Compatibility Directive 2014/30/EU
- Restriction of Hazardous Substances Directive 2011/65/EU
- The Tobacco Products Directive (2014/40/EU)

Battery Recycling:
The product's battery should be collected and sent to related recycling center.
This product complies with TPD. For any questions about TPD, please check the ECID number on the following website:
https://www.gov.uk/guidance/e-cigarettes-regulations-for-consumer-products

Product Verification

- Visit UWELL's official website www.uwellpps.com to verify under the SUPPORT navigation bar.
- Please scan the QR code on the package with your phone camera to verify. The result will be displayed on the page.
- Or you can enter the 16-bit anti-counterfeit code on the surface of the user manual into the input box, and the result will be displayed within seconds.

Attention

Please keep your package and the warranty card.

Warranty Parts

Device and atomizer only. Coil and pod are excluded.

Warranty Service Excluded Conditions

1. Expiration of warranty period.
2. Damage caused by failure to use, maintain and keep the product according to the requirements of the product instructions.
3. Damage caused by maintenance service personnel non-authorized by UWELL.
4. Damage caused by using inferior accessories of other brands.
5. Damage caused by the force majeure.

Warranty Service Guide

1. You can ask the shop you purchased your vaping device for the warranty service.
2. You can visit www.uwellpps.com and ask for warranty service under the SUPPORT navigation bar.
3. You can contact us through support@uwellpps.com if you have any questions.